

# GRX®

EG SORTING GRAB

Bent body in Strenx® 700  
high strength  
structural steel

Claws in Hardox® 450  
wear-resistant steel


Check valve as standard  
on GRX 15 EG, 20 EG, 25 EG  
& 30 EG

Accumulator optional on  
GRX 20 EG, 25 EG & 30 EG



**Universal hole pattern for**

Angled excavator attachment | RMR compact rotator | WDR worm drive

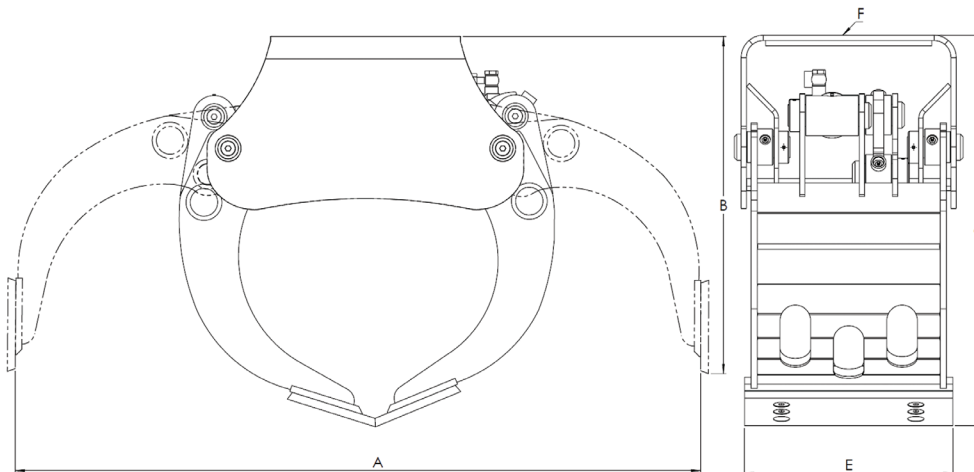

**MAXIMUM STRENGTH.  
IDEAL WEIGHT.**

	GRX 10 EG	GRX 15 EG	GRX 20 EG	GRX 25 EG	GRX 30 EG
<b>A</b>	949	1150	1300	1500	1702
<b>B</b>	451	497	631	735	808
<b>C</b>	520	616	731	840	964
<b>E</b>	343	366	395	439	700
<b>F</b>	140x140 M16 Centre Ø110	140x140 M16 205/10 M12 Centre Ø110	140x140 M16 270/16 M16 Centre Ø145	140x140 M16 270/16 M16 Centre Ø145	270/16 M16 340/16 M20 Centre Ø180

**MODEL  
SPECS**




<b>GRX 10 EG</b>	68	0,79	200	20	7,5	1,5-3
<b>GRX 15 EG</b>	102	0,10	200	20	6,7	3-6
<b>GRX 20 EG</b>	180	0,14	250	30	11	5-9
<b>GRX 25 EG</b>	263	0,19	250	40	14,5	8-13
<b>GRX 30 EG</b>	397	0,25	300	50	17,3	12-18



**MOUNTED WITH  
RMR COMPACT ROTATOR**



**Model**



GRX 10 EG / RMR 2	88	949	1,5-2,5
GRX 10 EG / RMR 3	96	949	1,5-3
GRX 15 EG / RMR 3	133	1150	2-3,5
GRX 15 EG / RMR 6 C	156	1150	3-6
GRX 20 EG / RMR 6 C	224	1300	3,5-6
GRX 20 EG / RMR 8	267	1300	5-8
GRX 25 EG / RMR 8	350	1500	6-8
GRX 25 EG / RMR 12	365	1500	7-12
GRX 30 EG / RMR 12	489	1702	7-12
GRX 30 EG / RMR 16 C	561	1702	9-16